

PRESENT STATUS OF SPACE DEBRIS OPTICAL OBSERVATIONAL FACILITY OF JAXA AT MT. NYUKASA

Toshifumi YANAGISAWA, Hirohisa KUROSAKI, Atsushi NAKAJIMA

*Japan Aerospace Exploration Agency
7-44-1, Jindaiji-higashi-machi Chofu Tokyo 182-8522, Japan
Email: tyanagi@chofu.jaxa.jp*

Key Words: Space Science, Space Technology, Format Sample

Abstract

The innovative technology research center of JAXA is developing observation technology to for GEO objects in order to deal with the space debris problem. The center constructed a space debris observation facility at Mt. Nyukasa, Nagano in 2006. Equipments such as CCD cameras and telescopes were set up, and routine observation was begun. This paper presents information about the facilities and their use.

1. Introduction

The Japan Aerospace Exploration Agency (JAXA) is studying observation technologies as part of the effort to deal with the space debris problems. JAXA's Innovative Technology Research Center constructed an optical observational facility at Mt. Nyukasa, Nagano in November 2006. As telescopes, CCD cameras, and analysis software came on line, the facility commenced routine observations to assist in the development of space debris observation technology. It joined the observation campaign organized by the Inter-Agency



Fig.1. Mt. Nyukasa optical observational facility of JAXA

Space Debris Coordination Committee (IADC) from March to May 2008 and detected 88 cataloged objects and 39 un-cataloged objects. This paper presents a detailed picture of the facility's observational equipments analytical methods, observation results and research activities.

2. Mt. Nyukasa optical observational facility of JAXA

The Mt. Nyukasa optical observational facility with a relatively small 35cm telescope as its main equipment was built to aid in the development of observational technologies for high-altitude space debris such as that in geostationary (GEO) or geo-transfer (GTO) orbits. The main objective of the facility is to develop detection technology for space debris less than 10 cm in size. For the present, we aim to detect 20 cm-sized space debris in GEO with the 35 cm telescope. Although 1m telescopes are able to detect 10-20cm-sized (20th magnitude) GEO debris easily, sophisticated image processing is required to detect objects of this size with a 35 cm telescope. By applying such processing to the data from a 1m telescope, detection of GEO debris less than 10 cm in size becomes possible.

The site is located at 1870 m altitude, which provides an outstanding optical environment. The site can detect dark asteroids of 22nd magnitude with the 35 cm telescope. Fig.1 shows an overview of the facility, which includes two domes, a control room, and two

Table.1. Details of the Mt. Nyukasa optical observational facility of JAXA

Location	138°10' 18"E, 35°54'05"N, 1,870m.
Telescopes	(a) Takahashi ϵ -350, Diameter: 355mm, Focal length: 1248mm(F/3.6) , Image circle: 70mm (b) Takahashi BRC-250M, Diameter: 250mm, Focal length: 1268mm(F/5.1), Image circle: 100mm
Mount	(a) Showa fork-type equatorial mount 25EF (b) Showa eccentric elbow-type equatorial mount 25EL
Dome	Nisshin Diameter:3m \times 2
CCD camera	(a) NIL 1Kx1K back-illuminated CCD, 13 μ m \times 13 μ m, Field of view: 0.6 \times 0.6-degree for ϵ -350 (b) NIL 2Kx2K back-illuminated CCD, 13.5 μ m \times 13.5 μ m, Field of view: 1.3 $^{\circ}$ \times 1.3 $^{\circ}$ for ϵ -350 (c) NIL 4Kx4K back-illuminated CCD, 15 μ m \times 15 μ m, Field of view:2.4 $^{\circ}$ \times 2.4 $^{\circ}$ for BRC-250M
Detection accuracy	(a) Time : 10 msec(Open and close time of shutter are measured using GPS time.) (b) Position : 0.2 arcsec for bright objects, 1 arcsec for faint objects.

habitats. One dome has a 35 cm telescope, the other a 25 cm telescope. Fig.2 shows the observational equipment in the domes. An eccentric elbow-type equatorial mount that can hold two 25 cm telescopes is shown in Fig.2 (a). A fork-type equatorial mount supporting a 35 cm telescope is shown in Fig.2 (b). This telescope has contributed to the discovery of many new asteroids. Detailed specifications of these equipments are listed in Table. 1.

3. CCD cameras

Three CCD cameras are used in this facility, a 1K1K-, a 2K2K-(Fig.3) and a 4K4K-camera (Fig.4). All the


cameras contain back-illuminated CCD chips that have high quantum efficiencies at optical wavelengths. The 1K1K- and the 2K2K-cameras are cooled by Peltier devices down to 30 degrees below room temperature. The 4K4K-camera is cooled by circulating refrigerant down to -100 degrees in Celsius. Readout times for these cameras are fairly fast ranging from 4 to 10 seconds. As the typical exposure time is from a few seconds to 10 seconds for GEO debris observation, a fast readout time is required for observational efficiency. The fields of view of the 2K2K-camera



Fig.2(a). Eccentric elbow-type mount, 25cm and 16cm telescopes.



Fig.2(b). Fork-type mount and 35cm telescope



(a) Top view



(b) Side view

Fig.3. 2K2K camera

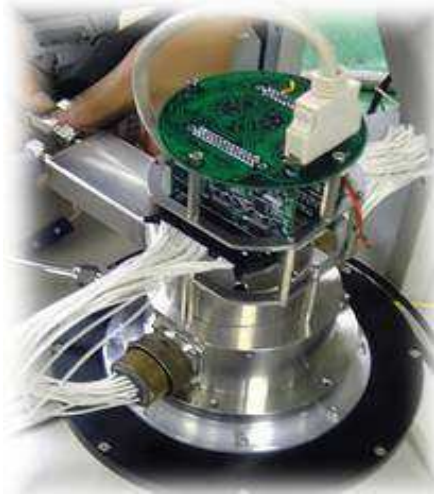


Fig.4. 4K4K-camera

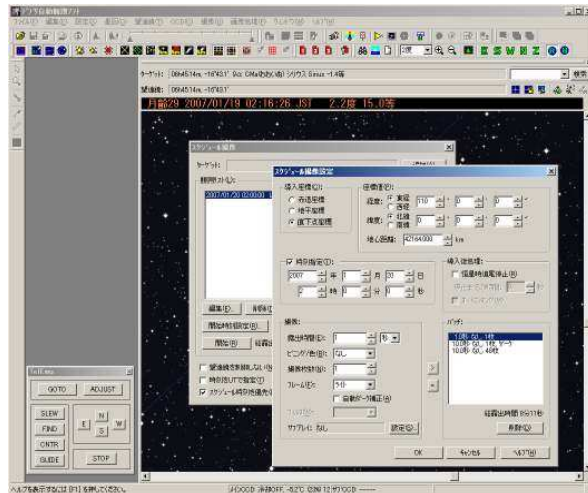


Fig.5. Debris auto-observational software

with the 35 cm telescope, and of the 4K4K-camera with the 25 cm telescope are 1.3×1.3 degrees and 2.4×2.4 degrees, respectively.

4. Observational software

Each telescope and its CCD camera are controlled by automatic debris-observing software. This software manages scheduled observations that specify coordinates of field of view, start times for exposures, exposure times, exposure mode, and number of CCD frames to be taken. The software executes all night observation automatically once it is set up. Fig.5 shows the setting of the schedule of the software. To determine the orbit of detected GEO debris with adequate precision, a measurement accuracy of 10 msec is required for the times of observation. The CCD cameras contain GPS devices that are connected to the sensor of the shutter for this purpose. The open and close times of the shutter are recorded in the image header with the unit of 0.001 second.

5. Analysis method

This section describes two analysis methods that are used at the Mt. Nyukasa optical observation facility.

5.1 The stacking method

The stacking method uses multiple CCD images to detect very faint objects that are undetectable on a single CCD image. We have been developing this image processing, investigating its effectiveness and trying to utilize actual GEO debris observation since 2000 [1] [2]. The general idea of this method is described below, and details are available in the references.

As shown in Fig.6, sub-images are cropped from many CCD images to follow the presumed movement of space debris. A median image of all the sub-images is then created. In this method, photons from the space debris arrive on the same pixels of the sub-images, and field stars are removed by taking the median because they appear in different places on each sub-image. Fig.7 shows an example of an asteroid detected using this method. Fig.7 (a) shows a part of one CCD image, and Fig.7 (b) shows the same region of the final image after the process was carried out using forty images. It is impossible to confirm the presence of the asteroid in Fig.7 (a), whereas the asteroid is bright and no field stars are shown in Fig.7 (b). The discovery of many new asteroids has proven the effectiveness of this method. The method enhances the detection ability of the 35 cm telescope to equal that of a 1 m telescope.

The only weak point of the stacking method is the time

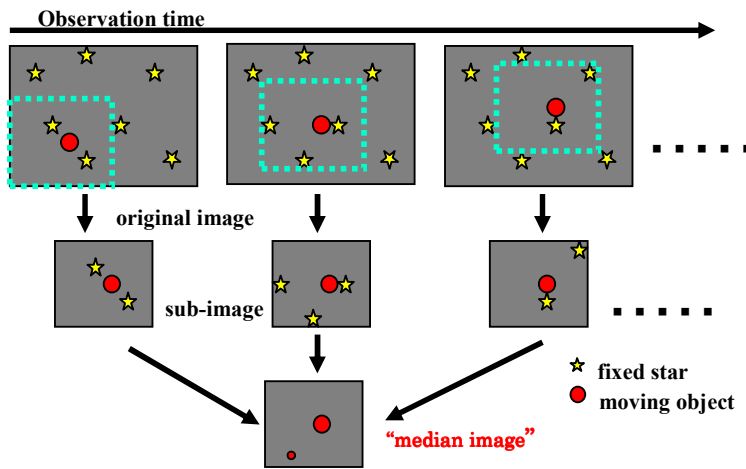


Fig.6. Stacking method

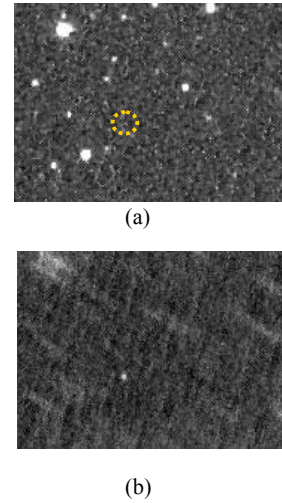


Fig.7. Asteroid detected by the stacking method

required to analyze the data when detecting an unseen object whose movement is not known, because a range of likely paths must be assumed and checked. Although main-belt asteroids and cataloged space debris whose movements can be estimated in some way are easy targets to detect, finding near-Earth objects and un-cataloged space debris is time-consuming work and not really practical. Using many PCs in parallel to reduce analysis time may be one solution. However, a hardware system purpose-built for this method, such as a field programmable gate array (FPGA) would be the best solution for use with an upcoming large-format CCD camera. As an FPGA is expected to reduce analysis time dramatically, efforts to translate this method to an FPGA system are underway at JAXA.

5.2 Line-identifying technique

We developed the line-identifying technique to complement the stacking method. Fig. 8 sketches the technique, and the details will be described in the near future. The line-identifying technique uses many CCD frames as the stacking method does. First, it detects candidate objects (black dots in Fig.8) using a threshold and a shape parameter. Then, it finds any

series of objects that are arrayed on a straight line from the first frame to the last frame. Appearing on a straight line as shown in Fig.8 means that an object is moving across the field of view at a constant velocity. Using this technique enables us to detect near-Earth asteroids and unknown space debris whose movements are unpredictable. The technique does not need to presume any particular movements of a target, as the stacking method does. The number of calculations depends on the number of candidates. For example, a commercial PC (DELL Precision 450) is able to analyze 17 frames with 400 candidates in each frame in 7 minutes, which is quite acceptable. The user can select an appropriate number of candidates in each frame by considering the capability of the PC and the number of frames. If a PC has sufficient power, the number of candidates can be increased by lowering the detection threshold, meaning that darker objects will be detectable.

Although the line-identifying technique works efficiently in a practical analysis time, its ability to detect faint objects does not measure up to the stacking method. Its analysis time increases exponentially with the number of candidates on each frame. The same problem arises with the stacking method, but since

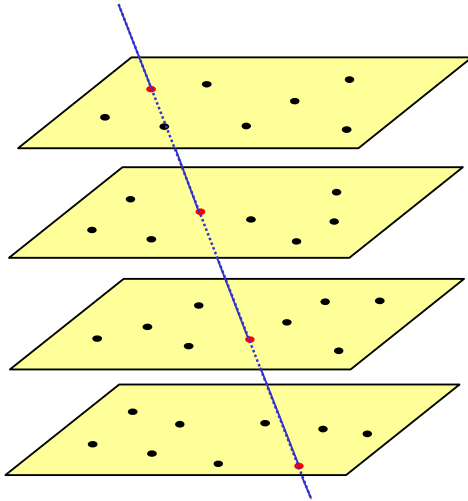


Fig.8. Line-identification technique

line-identifying can cope with this by reducing the number of candidates, that technique will be used to analyze the actual observational data while the FPGA system is being developed for the stacking method.

6. Orbital determination technique

After detection of space debris, the orbit of the detected target must be determined. A reliable orbital determination requires a long observational arc. However, the narrow field-of-view (FOV) of optical telescopes make it difficult to re-acquire the same object after a few hours, especially in the case of eccentric orbits. To get a long arc, a telescope must follow one target for a long period of time. Therefore, determining the precise orbits of many GEO-crossing objects is very time-consuming, and is not an efficient use of telescope time. Umehara invented an observational method that observes numerous bits of space debris efficiently, using one telescope to cope with this situation [3] [4]. The method utilizes a fundamental principle of orbital mechanics – an object in bound orbit always returns to the same orbit location after one complete revolution, if perturbation is negligible. This means if a telescope observes one specific inertia position for two nights, an object that passed through the field-of-view of the telescope in the

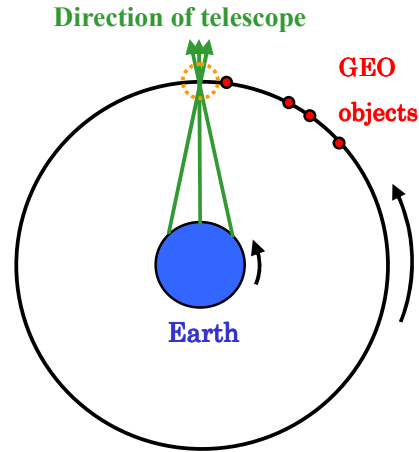


Fig. 9. Observation of one inertia position

first night must do so again in the second night (Fig. 9). From two nights' data, this method determines an approximate orbit that is accurate enough to predict the position of the target on the third night. Precise orbits are determined from three nights' data. Readers will find more detail on this method in the references.

We carried out a test observation to evaluate this method at the Mt. Nyukasa optical observation facility. One inertia position where a great deal of space debris was expected to pass through was monitored for three hours on each of two nights. On the first night, 20 objects were detected, and 18 on the second. Twelve objects were identified as twice-observed by comparing the elements of their presumed-circular orbits. For these objects, the positions on the third night were estimated from approximate orbits calculated from two nights' data. All the 12 objects were detected on the third night. Precise orbits were determined, and the standard deviations of o-c values (observed position – calculated position from the orbit) in right ascension and declination were a few arc-seconds and less than one arc-second, respectively.

7. IADC observation campaign

JAXA is a member of the Inter-Agency Space Debris Coordination Committee (IADC). We joined the

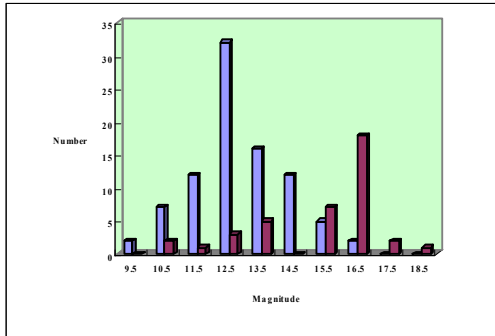


Fig. 10. Brightness distribution of cataloged (blue column) and un-cataloged (red column) objects.

observation campaign organized by the IADC from March to June 2008. Using the data from 10 days' observation, which was analyzed with the line-identifying technique described in section 5.2, 88 cataloged and 39 un-cataloged objects were detected. Fig.10 shows the brightness distribution of cataloged (blue column) and un-cataloged (red column) objects. The x-axis and y-axis show the brightness (magnitude) of detected objects and the quantity, respectively. Sample images of cataloged (12th magnitude) and un-cataloged (17th magnitude) objects that were detected using campaign data are shown in Fig.11. As can be seen from Fig.11, even with the line-identifying technique, fairly faint objects are detectable, although the stacking method has greater capability. Objects in geostationary orbit displaying a brightness of 16.5th and 17.5th magnitude are about 60cm and 40cm in size, respectively.

Summary

The research and development activity at the Mt. Nyukasa optical observation facility is aimed at establishing technologies for the detection and orbit determination of un-cataloged objects. This report describes how we are improving both the equipment and techniques to pursue this goal. Technologies developed here will be used at the Bisei Spaceguard

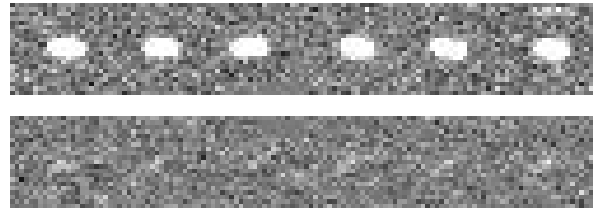


Fig. 11. Images of cataloged (upper) and un-cataloged (lower) objects that appear in data from the campaign. One is 12th magnitude and the other is 17th magnitude.

Center where constant observations are carried out. One technology will be transformed this year.

References

- [1] T.Yanagisawa, et al: Detection of Small GEO Debris by Use of the Stacking Method, Trans. Japan Soc. Aero. Space Sci, Vol.44, pp. 190-199, 2002
- [2] T.Yanagisawa et al: Automatic Detection Algorithm for Small Moving Objects, Publ. Astron. Soc. Japan, Vol57, pp. 399-408, 2005
- [3] Umehara, H. and Kimura, K.: An optical search for near-synchronous debris: Survey to 90 degrees of right ascension, J. Jpn. Soc. Aeronaut. Space Sci, 49, pp. 1-8, 2001 (in Japanese)
- [4] Umehara, H., Takahashi, M., Otsubo, T. and Kubo-oka, T.: Scan by Monitoring a Pair of Points -- Optical Survey Method for Near-Geosynchronous Orbits, Trans. JSASS Space Tech. Japan, 3, pp.13-22, 2005