

# SMARTnet™ – First Results of the Telescope Network

H. Fiedler<sup>(1)</sup>, J. Herzog<sup>(2)</sup>, M. Ploner<sup>(3)</sup>, M. Prohaska<sup>(4)</sup>, T. Schildknecht<sup>(5)</sup>, M. Weigel<sup>(6)</sup>, M. Klabl<sup>(7)</sup>

<sup>(1)</sup> DLR GSOC, Münchener Str. 20, 82234 Wessling, Germany, E-Mail: [hauke.fiedler@dlr.de](mailto:hauke.fiedler@dlr.de)

<sup>(2)</sup> DLR GSOC, Münchener Str. 20, 82234 Wessling, Germany, E-Mail: [johannes.herzog@dlr.de](mailto:johannes.herzog@dlr.de)

<sup>(3)</sup> DLR GSOC, Sidlerstr. 5, 3012 Bern, Switzerland, E-Mail: [martin.ploner@aiub.unibe.ch](mailto:martin.ploner@aiub.unibe.ch)

<sup>(4)</sup> DLR GSOC, Sidlerstr. 5, 3012 Bern, Switzerland, E-Mail: [marcel.prohaska@aiub.unibe.ch](mailto:marcel.prohaska@aiub.unibe.ch)

<sup>(5)</sup> DLR GSOC, Sidlerstr. 5, 3012 Bern, Switzerland, E-Mail: [thomas.schildknecht@aiub.unibe.ch](mailto:thomas.schildknecht@aiub.unibe.ch)

<sup>(6)</sup> DLR GSOC, Münchener Str. 20, 82234 Wessling, Germany, E-Mail: [martin.weigel@dlr.de](mailto:martin.weigel@dlr.de)

<sup>(7)</sup> DLR GSOC, Münchener Str. 20, 82234 Wessling, Germany, E-Mail: [martin.klabl@dlr.de](mailto:martin.klabl@dlr.de)

## ABSTRACT

Situation awareness of objects in the geostationary regime is of great interest for collision avoidance by active satellites as well as for scientific research on the space debris population and their evolution over time. As the number of satellite operators and researchers in this field is large, it makes sense to set up a sensor network with multiple entities to combine all available sensor measurements for a comprehensive situational picture. This will allow for cost sharing and optimising observation strategies to gain as much information as possible about the desired objects. Therefore, the German Space Operation Center, GSOC, together with the Astronomical Institute of the University of Bern, AIUB, are setting up a global optical sensor network called SMARTnet™: the Small Aperture Robotic Telescope Network. The main objective is the free exchange of all information gathered, mainly in form of tracklet observations, within all partners involved.

In this paper, the principles of SMARTnet™ are presented, how other entities can join the network and how tracklets are exchanged. The first two stations at Zimmerwald and Sutherland are introduced as well as possible future locations for additional telescope stations. Furthermore, results from the first two stations are shown. Additionally, a short insight is given in the data processing chain like object correlation, orbit determination, and cataloguing function.

## 1 INTRODUCTION

Increasing space debris is a challenge for spacecraft operators. To ensure safe operations of their own satellites, the operators must have knowledge about the orbits of the objects crossing or approaching to avoid any collision. To gain this knowledge, the United States Strategic Command (USSTRATCOM) is using several sensors and sensor systems to surveil Low Earth Orbits (LEO) as well as Geostationary Orbits (GEO). The sensor data is processed to catalogues by the Joint Space Operation Center, JSpOC, and partially published. As an extra service, JSpOC also informs spacecraft operators by sending warnings to the operators in form of

Conjunction Data Messages (CDM) in case of a close approach of an object. If receiving such a warning, the operator can analyse the event and, in case of a collision with high probability, decide to perform an avoidance manoeuvre or not. Here, the term “high probability” is interpreted differently by each individual satellite and each satellite mission and is not discussed in this paper. In any case, each avoidance manoeuvre costs mission time, man power, and extra fuel which cannot be used for the mission. Hence, each operator tries to constrain the number of such avoidance manoeuvres.

One of the parameters which go directly into the collision avoidance analysis is the accuracy of the orbit of the primary and secondary object – in most cases the covariance matrix. To get as precise orbit information as possible for the secondary object, the German Space Operation Center (GSOC) is able to engage the TIRA Radar of the Fraunhofer Gesellschaft for tracking objects in LEO in case of a close approach. For small objects in GEO, this is not feasible as the distance to the objects is too large. Gain better warnings in this region require more sensors with certain accuracy and a distribution of such sensors worldwide. Therefore, the German Space Operation Center (GSOC) together with the Astronomical Institute of the University of Bern (AIUB) are planning and setting up multiple telescope stations worldwide to survey the geostationary ring and labelling all objects within a data bank. This survey is not only for collision avoidance but also for understanding physics of the geostationary regime better. Hence, tracking of objects is one task which will be fulfilled by SMARTnet™ while the other task will be collecting as much information as possible.

## 2 SMARTnet™ Principles

SMARTnet™ consists at present of two telescope stations: Zimmerwald in Switzerland and Sutherland in South Africa. To monitor the complete geostationary regime, these two stations do not suffice. Three telescopes evenly distributed between 20°-40° North or South would allow for observing theoretically all objects. But, due to seasonal variations of the length of the night, it is more proficient to set up three telescopes

on the northern hemisphere and three on the southern hemisphere. With such a set-up, the averaged observation time will be enhanced to more than 11 hours per night while the Sun is below  $12^\circ$  under the horizon. With these considerations, the minimum number of stations would be six. Of course, it is not necessary to operate all the required stations by AIUB and DLR alone, cooperation – comparable to e. g. the ILRS network – with existing telescopes would alleviate to collect all data necessary. Within this cooperation, data collected by the network will be freely available for every joining partner. This is the main idea behind SMARTnet™: contribute with one or more operational sensors and receive all tracklets produced within SMARTnet™ for free. A schematic view of the network can be seen in Fig. 1:

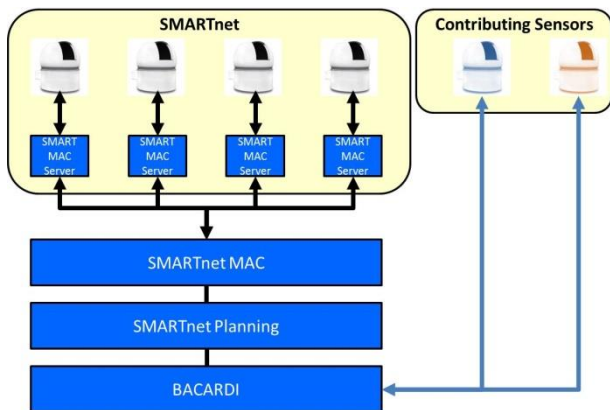


Figure 1. SMARTnet™ network with internal and external telescope stations.

The planning for SMARTnet™ is performed internal, optimisation algorithms for observations under development [1, 2]

Of course, some constrains shall be fulfilled to partner in SMARTnet™ like operational generation of tracklets, minimum aperture of the contributing telescope, ITAR-free production within the complete generation chain, no export limitations on tracklets etc. If a partner is accepted after an assessing period of approx. one month, there are different possibilities to contribute to SMARTnet™: make own operations and exchange data, get support for planning for own telescopes, or even get operations from SMARTnet™. The exchange of data is set up by a pick-up point at GSOC. Once a partner has complete access to all tracklets, the partner has the right to process all data exchanged, develop own algorithms, sell products with the limitation not selling any tracklets or data which allows for retrieving tracklets by reverse engineering.

### 3 First Stations: Zimmerwald and Sutherland

Zimmerwald is the first station of SMARTnet™ and is

located at the Swiss Optical Ground Station and Geodynamics Observatory Zimmerwald, near Bern, Switzerland. It consists of a fully automated wide field 20cm telescope. The sensor is used every clear night to provide tracklets from uncued survey observations of the GEO.

The second station was set-up during mid-March to mid-April 2017 in Sutherland, cf. Fig. 2. The station is fully automated, consisting of two telescopes. The smaller telescope with an aperture of 20cm serves for fast survey and the larger telescope with an aperture of 50cm for follow-up observations and deep survey. All data is pre-processed at the station to keep transferring data rates as low as possible. Here, pre-processing and on site operations are conducted from computers located in the near-by container. This system is able to operate the station for one week on its own without connection to AIUB or GSOC. After that time, an emergency plan will close the dome, park the telescopes and go to sleep mode until the operators from AIUB or GSOC will wake up the system to normal mode.



Figure 2. SMART-01 station near Sutherland, South Africa.

### 4 Processing Chain

The processing is performed by two different systems, one allocated in Bern, the other located in Oberpfaffenhofen. While the system in Bern is well-established, the system at GSOC still is under development. It is foreseen that the Backbone Catalogue of Relational Debris Information (BACARDI) will handle all processing tasks, such like

- correlating objects and object candidates
- determining orbits
- predicting orbits
- detecting of manoeuvres within ephemeris data
- tracking all meta- and log data (provenance data)
- prediction close approaches between objects and satellites
- predicting long-term evolution and re-entry of objects.

Some of the above mentioned algorithms are already operational while other tasks have to be completed. The algorithms foreseen are described in more detail in e.g. [3]. The task of BACARDI, exchanging data within SMARTnet™ and also with partners, is already tested and operational.

## 5 First Results

The SMARTnet™ sensor in Zimmerwald is producing data on a regular basis. In the first two months of 2017, tracklets were acquired in 42 clear nights. The sensor yields about 2800 single observations corresponding to about 500 tracklets during a clear winter night. These tracklets are then used to maintain the AIUB-internal catalogue of high-altitude objects. Figure 3 shows the position of 329 objects in the geostationary ring as detected by the Zimmerwald sensor during one night.

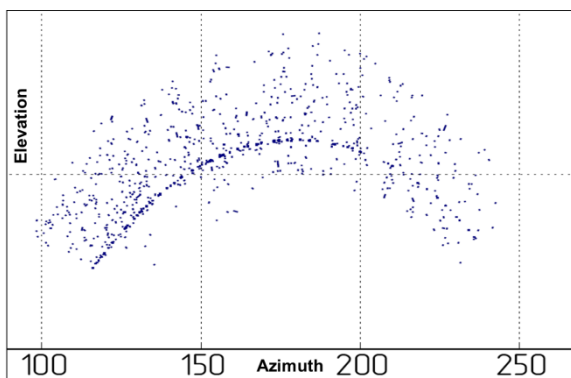


Figure 3. Result of observations of the sensor in Zimmerwald from one night showing the position of 329 objects in the geostationary ring as seen from Zimmerwald in an azimuth-elevation system

From April 4<sup>th</sup>, the second station at Sutherland has produced in the first night 659 tracklets which will fit into the same catalogue. This second station will start regular observations from end of April.

## 6 Outlook

The next station of SMARTnet™ will be set-up in Australia beginning 2018. The site is already selected, and the contract in negotiations. For the fourth site, a survey is planned in 2017 in South America, and setting-up is planned in 2018. For partners, SMARTnet™ is open and negotiations are going on.

## 7 REFERENCES

1. Hinze, Andreas und Fiedler, Hauke und Schildknecht, Thomas (2016) Optimal Scheduling for Geosynchronous Space Object Follow-up Observations Using a Genetic Algorithm. Advanced Maui Optical and Space Surveillance Technologies Conference (AMOS 2016), Hawaii, USA

2. Frueh, Carolin und Fiedler, Hauke und Herzog, Johannes (2016) Realistic Sensor Tasking Strategies. Advanced Maui Optical and Space Surveillance Technologies Conference (AMOS 2016), Hawaii, USA
3. Weigel, Martin und Meinel, Michael und Fiedler, Hauke (2015) Processing of Optical Telescope Observations with the Space Object Catalogue BACARDI. 25th International Symposium on Space Flight Dynamics ISSFD, 19.-23. Okt. 2015, München, Deutschland